


Advantages of profiled rail guide

High load bearing capacity

Long lifetime

High precision


Loads and load torques

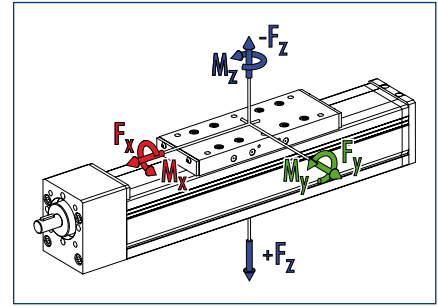


Load	Dynamic
F_x^{**} [N]	500
F_y [N]	500
F_z [N]	600
$-F_z$ [N]	300
Load torques	Dynamic
M_x [Nm]	12
M_y [Nm]	30 (50)
M_z [Nm]	30 (50)
M_{Amax} [Nm]	0.9 (p=4); 1.1 (p=5)

** Depends on speed and pitch n_{max}
KGT = 3000 rpm; TGT = 1500 rpm

① Values in brackets relate to the long slide.

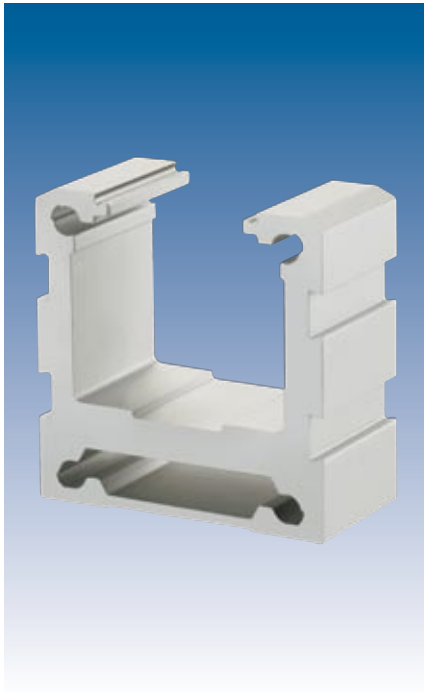


Spindle supports SA

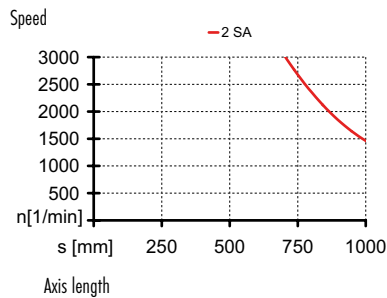

Technical data

Designation	B 40-SSS	
Max. travel speed	[m/s]	0.25
Repeat accuracy	[mm]	± 0.03
Max. acceleration	[m/s ²]	20
Idle torque	[Nm]	0.4
Maximum stroke	[mm]	890
Max. total length	[mm]	1090
Moment of inertia	[kgm ²]	0.000012
Drive element	Ball screw spindle drive	
Max. spindle speed	[rpm]	3000
Diameter	[mm]	12
Pitch	[mm]	4 / 5
Drive element	Trapezoidal threaded drive	
Max. spindle speed	[rpm]	1500
Diameter	[mm]	12
Pitch	[mm]	3
Weights		
Basic without travel	[kg]	1.7
Travel per 100 mm	[kg]	0.4
Slide plate 120 mm	[kg]	0.4
Slide plate 200 mm	[kg]	0.65


Main views

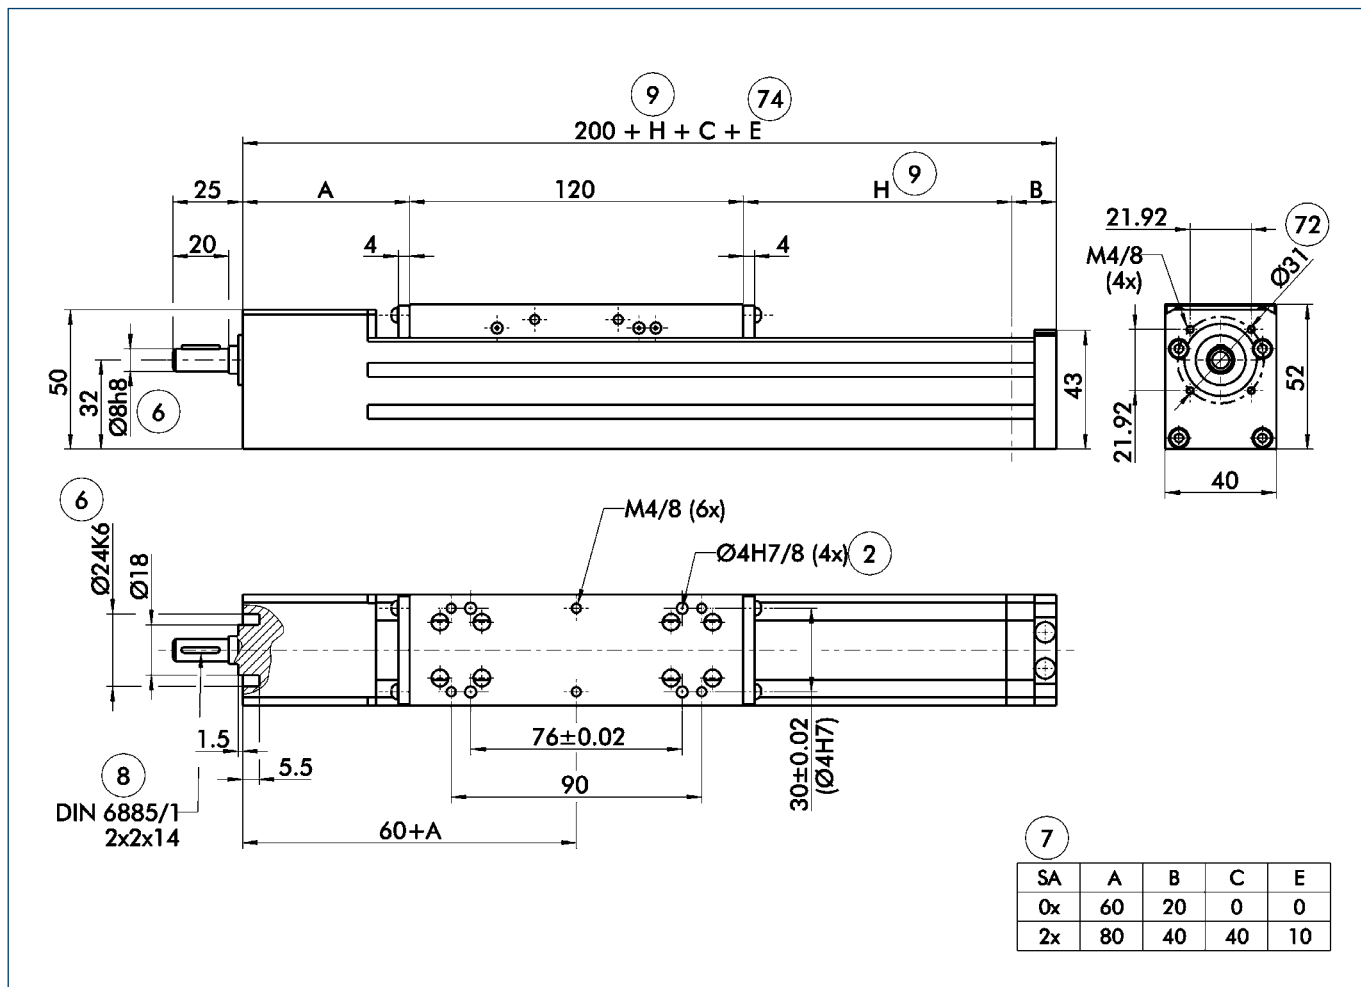

- ② Assembly connection
- ⑥ Drive connection
- ⑦ Number of spindle supports
- ⑧ Feather key DIN 6885
- ⑨ Useful stroke
- ⑦② Bolt pitch circle

- ⑦④ E for spindle supports with insulated noise emissions


Long slide

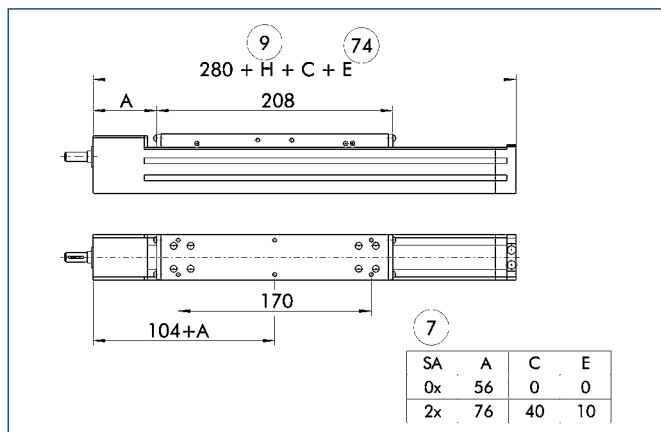

- ⑦ Number of spindle supports
- ⑨ Useful stroke


- ⑦④ E for spindle supports with insulated noise emissions

Profile SSS

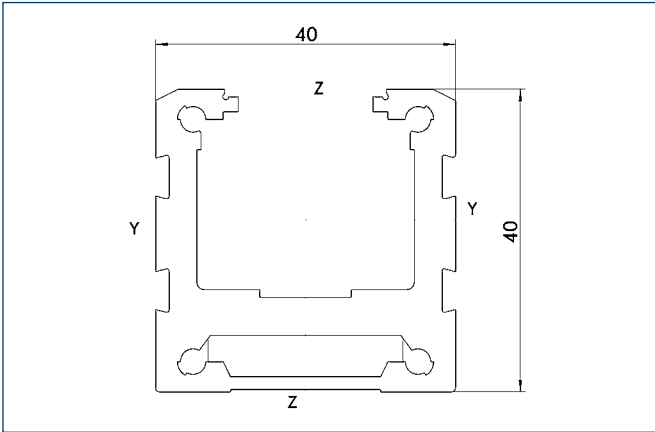

Specific mass	[kg/m]	1.71
Planar dimension	[mm ²]	635
Planar moment of inertia I _y	[mm ⁴]	88917
Planar moment of inertia I _z	[mm ⁴]	133350
Load torque W _y	[mm ³]	3757
Load torque W _z	[mm ³]	6665

Mounting

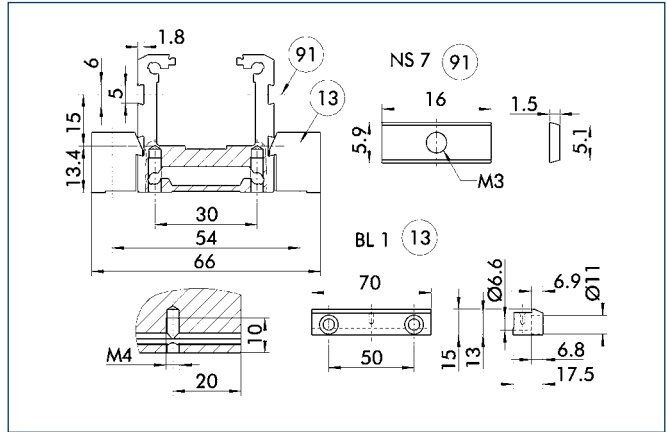


13 Mounting strip

91 Side T-nut

The profile can be secured either using T-nuts or mounting strips.

Designation	Order designation	ID no.
T-nut	NS7	0331423
Mounting strip	BL1	0331400

Motor flange schematic diagram

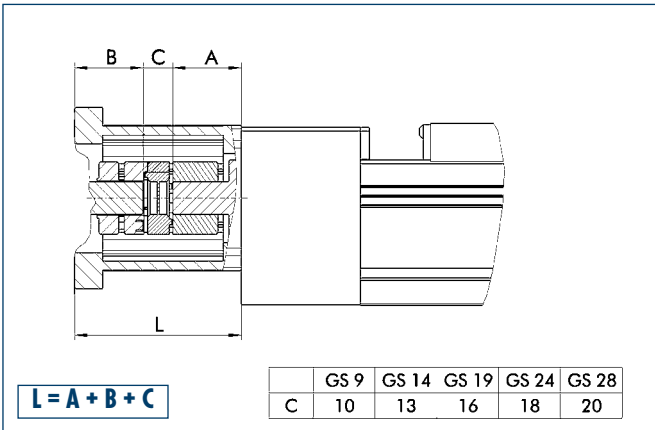


The table shows the relevant dimension **C** of the standard couplings. For dimension **A** refer to drive journal connection dimensions, for dimension **B** refer to corresponding motor dimension sheet, dimension **L** may differ in individual cases.

Different drive solutions can be attached to our axes. SCHUNK can supply you with the right motor flange and coupling for your drive.

① Because of the different thermal behavior of motors, we recommend that the drive solution is tested by the motor manufacturer.

Angle gear schematic diagram

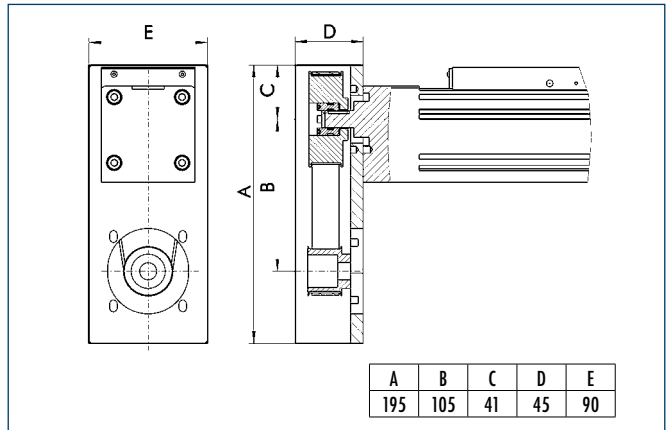


Possible transmission ratios: $i = 1 : 1$, $i = 2 : 1$, $i = 3 : 1$

Caution: Dimension **C** can change at $i \neq 1:1$ or with smooth motor shafts (without feather key).

Even in tight conditions, different drive solutions can be attached. SCHUNK can provide you with the right angle gear for your drive.

① Because of the different thermal behavior of motors, we recommend that the drive solution is tested by the motor manufacturer.

Limit switch position

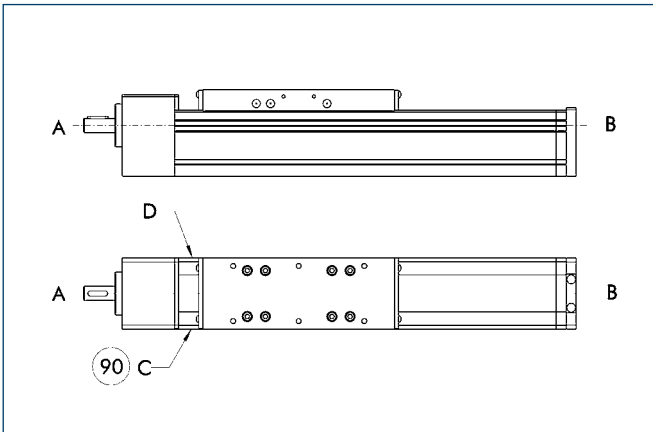

90 Limit switch standard position


Two E02 switches are used as limit switches and an RS2 as the reference switch as standard.

① The positions and dimensions of limit switches, switching lugs, and mounting components may vary depending on the application and the selected limit switches. Please contact us for assistance.

Limit switch selection

Designation	Order designation	ID no.
Inductive limit switch, opener, 2 m cable	E02	0331410
Inductive limit switch, opener, 10 m cable	E010	0331412
Inductive limit switch, closer, 2 m cable	ES2	0331411
Inductive limit switch, closer, 10 m cable	ES10	0331413
Mechanical limit switch (Siemens), opener	EMS	0331414
Mechanical limit switch (Balluff), opener	EMB	0331415

Lubrication connections

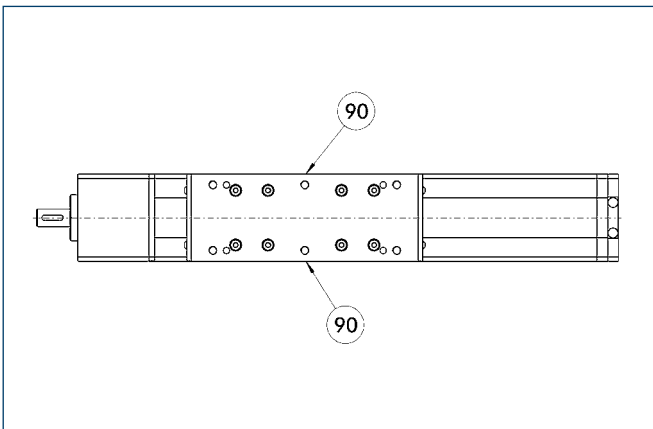

90 Standard lubrication connection

Standard connection

Lubrication nipple M8x1

If the lubrication connection has a different seat, this must be defined in the order text.

 More detailed information on pedestal bearings, connection shafts and bevel gears can be found in the "OPTIONS for System HSB" section of the catalog.